

HDT CONTAINER DRYER

- Execution in solid steel sheet S 235 JR
- Wall thickness 2 mm
- For all performances and also for very small quantities of products to be dried
- Suitable for all heating materials (conventional fuels, biomass or electric heater)
- Low space requirement
- Attractive price


Products to be dried:

- Seeds and human food
- All types of grain: wheat, barley, oats, etc.
- Ear corn and maize seeds
- Oilseeds such as sunflower seeds, rape, soya and legumes
- Fine seeds, herbs and spices




Execution of the dryer-containers:

- Flat-bottom with perforated steel sheet or wire mesh
- Hopper-bottom with aeration joist

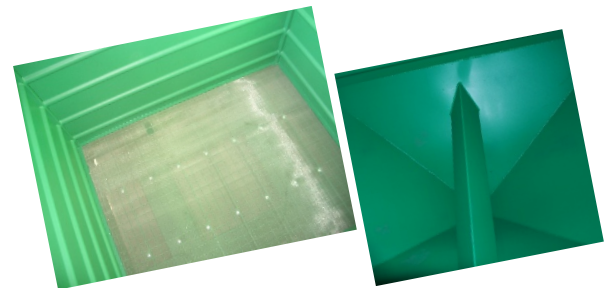

Separate aeration of each container: dryer-plants with 1-32 pcs. containers

Semi-automatic small plants and automatically controlled plants

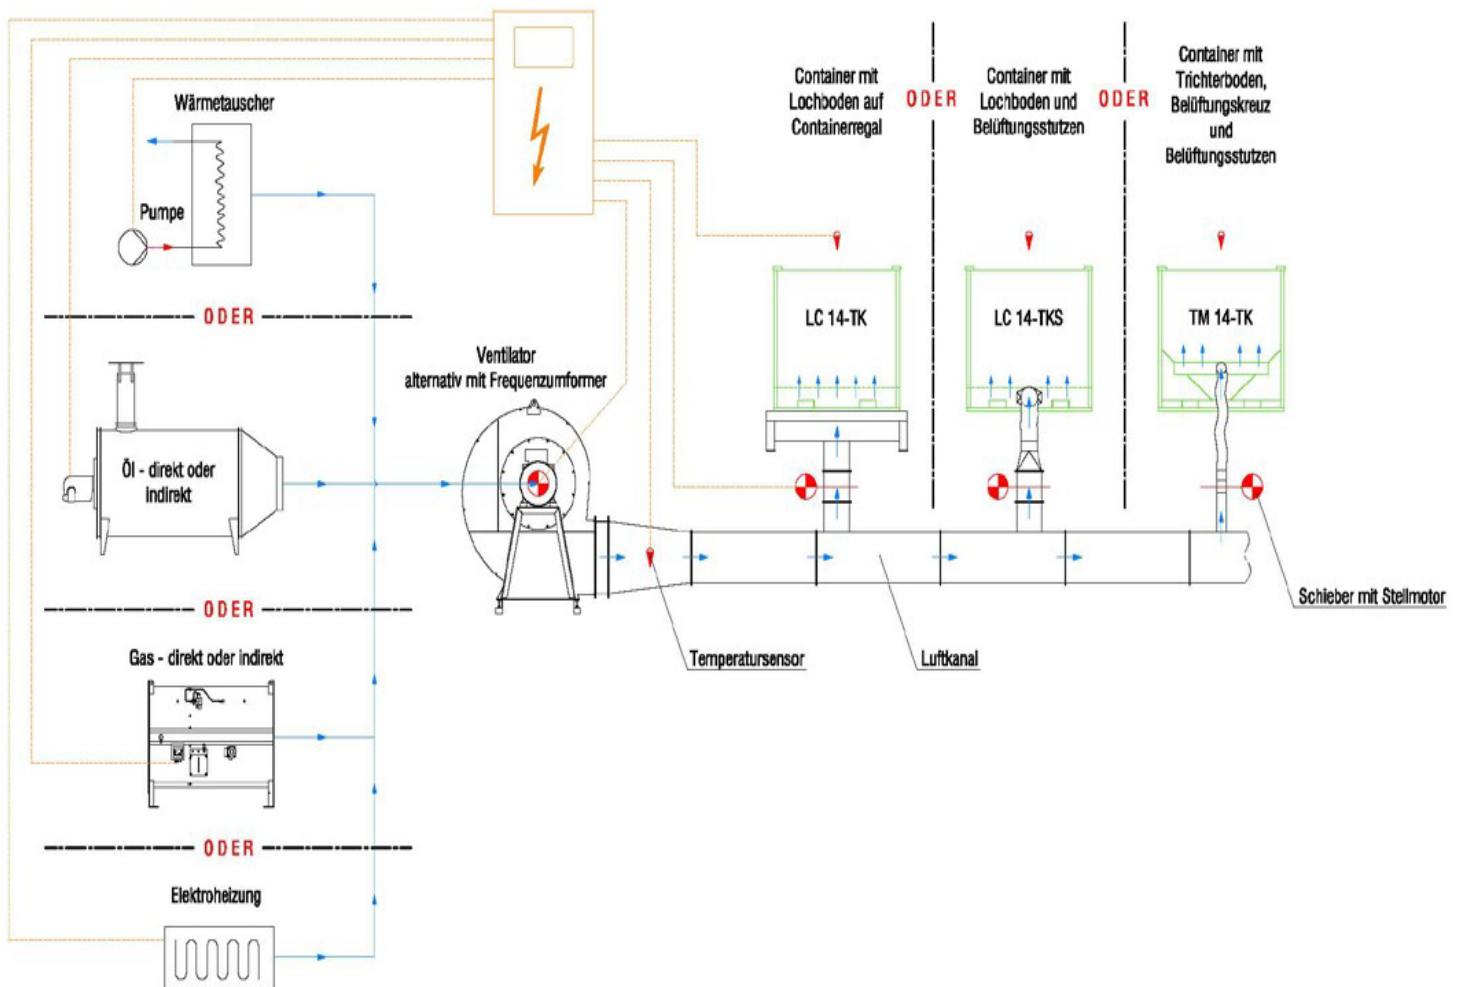

Art.no.	type	Description of the dryer containers with smooth walls
TC51.110	LC14-TK-G	Double-flat bottom without outlet, with perforated steel sheet, painted or galv.
TC51.112	LC14-TK-G	Double-flat bottom without outlet, with wire mesh, painted or galvanized
S-TC	zu LC14-TK-G	Extra costs for lateral outlet, painted or galvanized
TC80.330	TM14-TK-G	Hopper bottom with centred outlet, aeration joist, painted green or galvanized
TC81.440	TM14-FK-TK-G	Hopper bottom, walls 60°, larger outlet, aeration joist, painted or galvanized
VL30.71	accessory	Fleece inlay for LC14-TK-G for drying fine seeds
SL77	accessory	Airmetal-hose 125 mm Ø, with clamp, price per metre
D71-alu	accessory	Alu-cover, weight 5,5 kg
PV71.00	accessory	PVC-covering sheet, 650 g/m ² , with rubber cord, water-proof, hemmed, green
R71.00	accessory	Heavy duty wheels, castor and fixed wheels
E-ST.01	electr. control	Temperature control
E-ST.02	electr. control	Control of temperature and humidity



Kontakt: Fa. HDT – Haus der Technik GmbH
Marktstraße 24-26 – A-2004 Niederfellabrunn, AUSTRIA
Tel.: 0043 2269 2287 – Fax: 0043 2269 24087
Email: office@hdt-foodmachines.at – Internet: www.hdt-foodmachines.at